


sat 805

Pulse Oximetry System



Documentation

PC reporting software *satview* for easy and quick analysis and complete monitoring documentation.



Easy operation and clear illustration of monitoring periods, alarm events, data analysis including a printed one-page-report.

Technical specifications


Dimensions (HxWxD)	92 x 240 x 104 mm
Weight	900 g incl. battery
Int. power supply	Li-Ion-battery, 7.2 V / 4.6 Ah
Battery capacity	20 hrs guaranteed, 24 hrs typ.
Interfaces	Analog, USB, nurse call
Ext. power supply	9.3 V / 12 W
SpO ₂ Display range	1 - 100 %
Calibration range	70 - 100 %
Resolution	1 %
Pulse Display range	25 - 240 bpm
Calibration range	25 - 240 bpm
Resolution	1 bpm
Perfusion display range	0 - 20.0 %
Alarms	SpO ₂ , pulse, battery, sensor, status
Memory	User profiles
	Event alarm list
	Trace and trend data

Package contents	
sat 805 Pulse oximetry system	39-1000
<i>including</i>	
Pulse oximeter	39-1001
Instructions for use	39-1201
Patient cable	16-1173
Power supply	28-5009



Accessories

Masimo sensors, mounting bracket, carrying handle, power supplies (Euro, UK, US), carrying case, car power converter, *satview* PC software

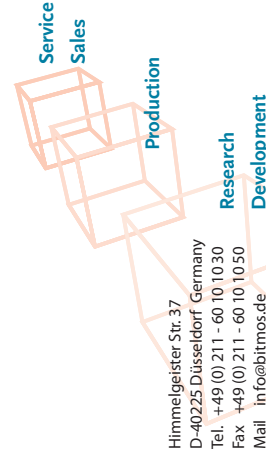

*Innovative technology
Simple operation*

www.bitmos.de



© Bitmos GmbH Düsseldorf 07 2013 O/N 39-2301

Bitmos
MEDIZINTECHNIK

Bitmos
MEDIZINTECHNIK

sat 805
Pulse Oximetry System
for Clinic, Sleep Lab
and HomeCare

New standard in operation and technology

The development of the Bitmos sat 805 – Made in Germany – sets new limits in pulse oximetry. The modern design reflects its intrinsic values: top-level quality.



Remote alarm

Analogue interface

SD Card

Simple operation
USB interface



Brilliant LC display

What is MasimoSET ?

MasimoSET™ represents a fundamentally distinct method of measuring and processing of arterial oxygen saturation and pulse rate.

MasimoSET™ combines

sophisticated signal algorithms with an innovative sensor design.
Bitmos sat 805 combines the advantages of this technology with user-orientated features.



Bitmos sat 805 eliminates false alarms and monitors arterial oxygen saturation accurately during motion and low perfusion.

Exceptional ease of use for clinical, sleep lab and home care applications



Simple operation

The multifunctional rotary encoder serves as the main operating and alarming element. The proven menu structure is widely accepted and assures minimum training. The LC display is not only large: the high-contrast backlight enables a perfect visibility under all lighting conditions.



Latest Li-Ion battery technology assures a mains-independent operating time of 20 hours minimum. Merged with its compact design, the sat 805 has unique advantages during mobile use.


Left: rotary encoder with combined alarming function.
Middle: Data export via SD Card.
Right: Handy dimensions, multiple interfaces: remote alarm, analogue, USB.

Data storage and export is carried out by means of a MultiMediaCard. All monitoring data is transferred quickly, easily and safely to the PC reporting software in minimum time.



Innovative serviceability

System updates may be carried out on-site. Modular component setup allows quick and easy repair within minutes.

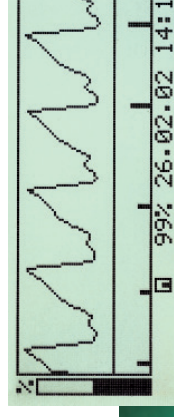

The Signal IQ™ bar (lower trace) is an exact and additional indicator for signal quality.



The sat 805 is specifically suited for home use and for newborns by its exceptional operational concept and sophisticated Masimo pulse oximetry technology.

